FLUSHFIT COUPLINGS

COMPACT DESIGN, SUPERIOR PERFORMANCE

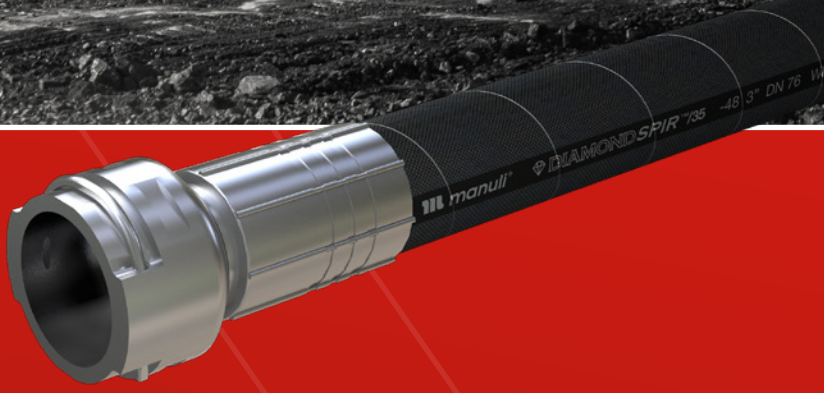

manuli® HYDRAULICS

FLUSHFIT COUPLINGS

COMPACT DESIGN, SUPERIOR PERFORMANCE

The Manuli Hydraulics range of Flushfit connectors provides a unique solution where the staple is located within the envelope of the assembly.

This sleek design enables a more compact and efficient means of making hydraulic connections and installing hose pressure lines, whilst actively minimising the risk of hose abrasion due to contact with the staple.

FEATURES & BENEFITS:

- Increased strength and performance
- Snag-free profile
- Minimises hose damage and abrasion
- Large bore XXL size range
- Reduces handling / installation time

TECHNICAL SPECIFICATIONS:

	Range	Dash	Inches	DN	W.P. (bar)	W.P. (psi)
Low Pressure Return Lines	SA Flushfit (SAF)	16	1	25	350	5,000
		24	1½	38	185	2,683
		32	2	51	112	1,624
		40	2½	63	140	2,030
	SA Flushfit PLUS (SAFP)	48	3	76	105	1,523
		56	3½	89	105	1,523
	SA Flushfit PLUS XTRA (SAFPX)	48	3	76	140	2,030
High Pressure Feed Lines	SH Flushfit & Sliderlock (SHF & SLH)	24	1½	38	420	6,000
		32	2	51	420	6,000
		40	2½	63	350	5,000
		48	3	76	350	5,000

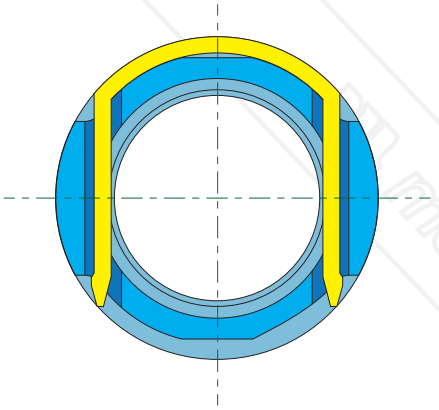

Cross-Section Of a Flushfit Fitting with Staple In-Situ

Disclaimer: We reserve the right to modify our products and/or related services and/or discontinue the manufacture and/or supply of any of the products and/or related services, without notice. This document supersedes all previous versions and previously issued documentation. The only official source of technical crimping parameters regarding our products is our Digital Crimp Tools. Printed copies are uncontrolled therefore, please be sure to use the latest versions of our Manuli Crimp App or Crimp Web Tool. Do not mix and match: always use Manuli original hoses and fittings. For more information, see our 'Safety Guide' by scanning the QR code.

DON'T MIX & MATCH

© 2026 Manuli Ryco group. All rights, including trademarks, reserved. | 10-2026 | V1-0